

# GT5Y Series Miniature Electronic Timers

## Four Selectable Operation Modes. Six Selectable Time Ranges. Delayed Output 4PDT/3A or DPDT/5A.

- Four operation modes: ON Delay, Interval ON, Cycle OFF, and Cycle ON
- Repeat error:  $\pm 0.2\% \pm 20$  ms maximum
- Miniature size
- LED indicators for output and power
- Complies with safety standards. UL/c-UL listed. EN compliant.




Note: When using as a UL Listing approved product, use IDEC timer sockets under the below conditions.

SY4S-05\*, SM2S-05\* (Specify A, B, C, DF, DN, or U in place of \*)

- Wire conductor temperature rating: 60°C min.
- Copper wire only: AWG14 max. (2mm<sup>2</sup> max.), AWG14 max. (0.9mm<sup>2</sup> max.)
- Tightening torque: 0.6 to 1.0N·m

SU4S-11L, SU2S-11L

- Wire conductor temperature rating: 60°C min.
- Copper wire only: AWG16 max. (solid wire 1.5mm<sup>2</sup> max., stranded wire 1.25mm<sup>2</sup> max.), AWG18 max. (0.9mm<sup>2</sup> max.)

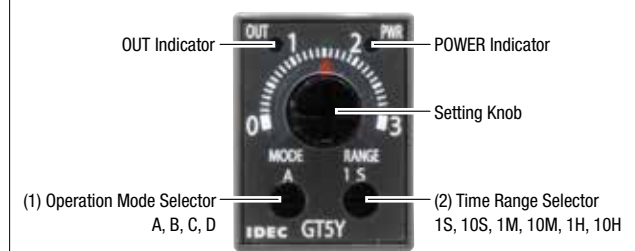

Package Quantity: 1

(1) Operation Mode	Contact	Output	Time Ranges	Operating Voltage	Part No. (Ordering No.)			
A: ON Delay	DPDT	220V AC/ 30V DC, 5A	0.1S to 10H	100 to 120V AC	GT5Y-2SN1A100			
			0.1S to 30H		GT5Y-2SN3A100			
			0.1S to 60H		GT5Y-2SN6A100			
			B: Interval ON	DPDT	220V AC/ 30V DC, 5A	0.1S to 10H	200 to 240V AC	GT5Y-2SN1A200
						0.1S to 30H		GT5Y-2SN3A200
						0.1S to 60H		GT5Y-2SN6D12
C: Cycle OFF	DPDT	220V AC/ 30V DC, 5A				0.1S to 10H	12V DC	GT5Y-2SN1D12
						0.1S to 30H		GT5Y-2SN3D12
						0.1S to 60H		GT5Y-2SN6D12
			D: Cycle ON	4PDT	30V DC, 3A	0.1S to 10H	24V DC	GT5Y-2SN1D24
						0.1S to 30H		GT5Y-2SN3D24
						0.1S to 60H		GT5Y-2SN6D24
A: ON Delay	4PDT	30V DC, 3A				0.1S to 10H	100 to 120V AC	GT5Y-4SN1A100
						0.1S to 30H		GT5Y-4SN3A100
						0.1S to 60H		GT5Y-4SN6A100
			B: Interval ON	4PDT	30V DC, 3A	0.1S to 10H	200 to 240V AC	GT5Y-4SN1A200
						0.1S to 30H		GT5Y-4SN3A200
						0.1S to 60H		GT5Y-4SN6A200
C: Cycle OFF	4PDT	30V DC, 3A				0.1S to 10H	12V DC	GT5Y-4SN1D12
						0.1S to 30H		GT5Y-4SN3D12
						0.1S to 60H		GT5Y-4SN6D12
			D: Cycle ON	4PDT	30V DC, 3A	0.1S to 10H	24V DC	GT5Y-4SN1D24
						0.1S to 30H		GT5Y-4SN3D24
						0.1S to 60H		GT5Y-4SN6D24

Note: S and M of the time range indicate second, and minute respectively.

## Time Ranges

Code	Scale	(2) Time Range Indication	Time Range
1: 0.1S to 10H	0 to 1	1S	0.1 sec to 1 sec
		10S	0.2 sec to 10 sec
		1M	1 sec to 1 min
		10M	10 sec to 10 min
		1H	1 min to 1 hr
		10H	10 min to 10 hr
3: 0.1S to 30H	0 to 3	1S	0.1 sec to 3 sec
		10S	0.5 sec to 30 sec
		1M	3 sec to 3 min
		10M	30 sec to 30 min
		1H	3 min to 3 hr
		10H	30 min to 30 hr
6: 0.1S to 60H	0 to 6	1S	0.1 sec to 6 sec
		10S	1 sec to 60 sec
		1M	6 sec to 6 min
		10M	1 min to 60 min
		1H	6 min to 6 hr
		10H	60 min to 60 hr


## Contact Ratings

Part No.	GT5Y-4	GT5Y-2
Contact Configuration	4PDT	DPDT
Rated Load	Resistive Load Inductive Load $\cos\theta=0.3, L/R=7ms$	Resistive Load Inductive Load $\cos\theta=0.3, L/R=7ms$
Maximum Switching Voltage	220V AC, 3A/30V DC, 3A 220V AC, 0.8A/30V DC, 1.5A	220V AC, 5A/30V DC, 5A 220V AC, 2A/30V DC, 2.5A
Maximum Switching Current	250V AC/125V DC	250V AC/125V DC
Maximum Switching Frequency	3A	5A (Note)
Allowable Contact Power	1800 operations/hour	1800 operations/hour
Resistive Load	AC: 660VA/DC: 90W	AC: 1100VA/DC: 150W
Inductive Load $\cos\theta=0.3, L/R=7ms$	AC: 176VA/DC: 45W	AC: 440VA/DC: 75W
Minimum Applicable Load	5V DC, 10mA (reference value) 24V DC, 5mA (reference value)	5V DC, 20mA (reference value) 24V DC, 10mA (reference value)
External Protection Element	Fuse 250V 3A	Fuse 250V 5A
Life	Electrical Mechanical	Electrical Mechanical
	200,000 operations minimum (220V AC, 3A) 50 million operations minimum	500,000 operations minimum (220V AC, 5A) 50 million operations minimum

Note: See Operating Temperature - Maximum Switching Current Characteristics.

### Operating Temperature - Maximum Switching Current Characteristics

Check the derating curve described below when mounting more than two GT5Y-2 timers and SM2S-05\* sockets.

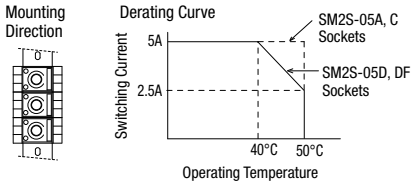

### General Specifications

Model	GT5Y-□SN	
Operation	ON Delay / Interval ON / Cycle OFF / Cycle ON	
Pollution Degree	2 (IEC60664-1)	
Overvoltage Category	III (IEC60664-1)	
Rated Operational Voltage	A200	200 to 240V AC (50/60Hz)
	A100	100 to 120V AC (50/60Hz)
	D24	24V DC
	D12	12V DC
Voltage Range	A200	170 to 264V AC (50/60Hz)
	A100	85 to 132V AC (50/60Hz)
	D24	21.6 to 26.4V DC
	D12	10.8 to 13.2V DC
Reset Voltage	Rated Voltage × 20% minimum	
Operating Temperature	-10 to +50°C (no freezing and condensation)	
Storage/Transportation Temperature	-30 to +80°C (no freezing and condensation)	
Operating Humidity	35 to 85% RH (no condensation)	
Storage Humidity	35 to 85% RH (no condensation)	
Altitude	0 to 2000m (operation), 0 to 3000m (transportation)	
Reset Time	100 ms maximum	
Repeat Error	Within ±0.2%, ±20 ms	
Voltage Error	Within ±0.5%, ±20 ms	
Temperature Error	±3%	
Setting Error	±10%	
Insulation Resistance	100 MΩ minimum (500V DC megger)	
Dielectric Strength	Between power and output terminals: 2000V AC, 1 minute Between contacts of different poles: 2000V AC, 1 minute Between contacts of the same pole: 1000V AC, 1 minute	
Vibration Resistance	Operating extremes: 10 to 55 Hz, amplitude 0.5 mm, 10 minutes each in 3 directions Damage limits: 10 to 55 Hz, amplitude 0.75 mm, 2 hours each in 3 directions	
Shock Resistance	Operating extremes: 98 m/s <sup>2</sup> , Damage limits: 490 m/s <sup>2</sup> , 3 shocks each in 6 directions	
Degree of Protection	IP40 (timer), IP20 (socket) (IEC60529)	
Power Consumption (approx.)	A200	1.2 VA (200V AC/60Hz), 1.2 VA (200V AC/50Hz)
	A100	1.1 VA (100V AC/60Hz), 1.2 VA (100V AC/50Hz)
	D24	1.0W
	D12	0.9W
Dimensions	27.7H × 21.0W × 58.3D mm	
Weight (approx.)	42g	

Note: See Operating Temperature – Maximum Switching Current Characteristics.

### Operation Charts and Internal Connections


Operation Mode	Item	Operation
A: ON Delay	Terminal No.	13-14 (POWER)
	Terminal No.	1-9, 2-10, 3-11, 4-12 (NC)
	Terminal No.	5-9, 6-10, 7-11, 8-12 (NO)
	POWER Indicator	
	OUT Indicator	
	Terminal No.	13-14 (POWER)
B: Interval ON	Terminal No.	13-14 (POWER)
	Terminal No.	1-9, 2-10, 3-11, 4-12 (NC)
	Terminal No.	5-9, 6-10, 7-11, 8-12 (NO)
	POWER Indicator	
	OUT Indicator	
	Terminal No.	13-14 (POWER)
C: Cycle OFF	Terminal No.	13-14 (POWER)
	Terminal No.	1-9, 2-10, 3-11, 4-12 (NC)
	Terminal No.	5-9, 6-10, 7-11, 8-12 (NO)
	POWER Indicator	
	OUT Indicator	
	Terminal No.	13-14 (POWER)
D: Cycle ON	Terminal No.	13-14 (POWER)
	Terminal No.	1-9, 2-10, 3-11, 4-12 (NC)
	Terminal No.	5-9, 6-10, 7-11, 8-12 (NO)
	POWER Indicator	
	OUT Indicator	
	Terminal No.	13-14 (POWER)

(Internal Connections)

- GT5Y-4
- GT5Y-2

### Electrical Life Curves

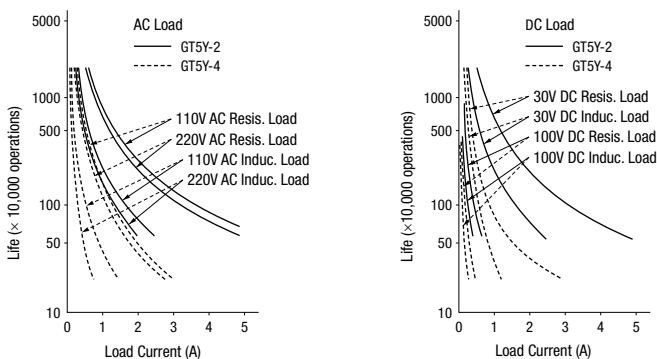


Dimensions

All dimensions in mm.

(When using DIN Rail Mount Socket)

GT5Y-4


See Relay Sockets catalog for SY4S-05B, SY4S-05C, SY4S-05D, SY4S-05DF.

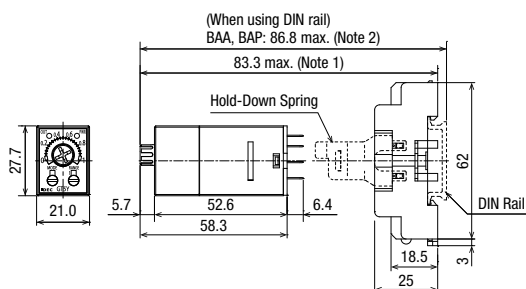

Note 1: SY4S-05B: 83.3 max., SY4S-05C: 83.3 max., SY4S-05D: 88.3 max., SY4S-05DF: 88.3 max.  
 Note 2: SY4S-05B: 86.8 max., SY4S-05C: 86.8 max., SY4S-05D: 91.8 max., SY4S-05DF: 91.8 max.


GT5Y-2

See Relay Sockets catalog for SM2S-05B, SM2S-05C, SM2S-05D, SM2S-05DF.

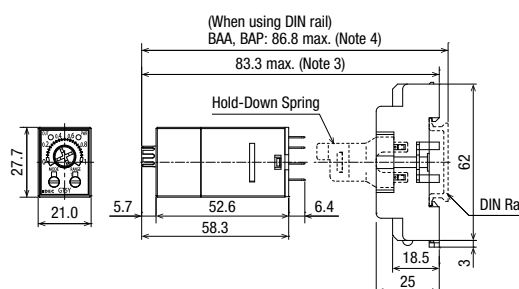

Note 3: SM2S-05B: 83.3 max., SM2S-05C: 83.3 max., SM2S-05D: 88.3 max., SM2S-05DF: 88.3 max.  
 Note 4: SM2S-05B: 86.8 max., SM2S-05C: 86.8 max., SM2S-05D: 91.8 max., SM2S-05DF: 91.8 max.

GT5Y-4 and SU4S-11L, GT5Y-2 and SU2S-11L

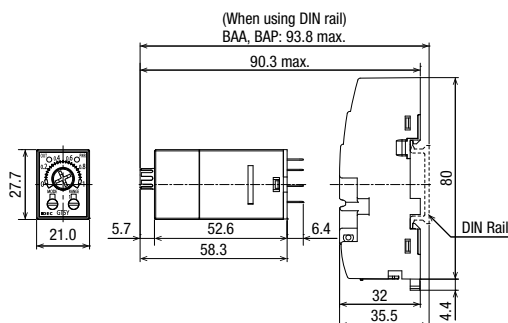

Applicable hold-down spring: SFA-202

Accessories

Accessories

Both SY4S-05B, SY4S-05C, SY2S-05B, SM2S-05B, and SM2S-05C are UL recognized, CSA certified, and TÜV approved. Others are UL recognized and CSA certified, except for SY4S-05A and SM2S-05A.

When ordering, specify the Ordering No.

Item	Part No.	Ordering No.	Package Quantity	Remarks	
DIN Rail Mount Socket	Socket	SY4S-05B	SY4S-05A	1	For 4PDT contact (Screw)
		SY4S-05C	SY4S-05C	1	For 4PDT contact (Screw)
		SY4S-05DF	SY4S-05DF	1	For 4PDT contact (Screw)
		SU2S-21L	SU2S-21L	1	For DPDT contact (Push-in)
		SU4S-21L	SU4S-21L	1	For 4PDT contact (Push-in)
		SM2S-05B	SM2S-05A	1	For DPDT contact (Screw)
		SM2S-05C	SM2S-05C	1	For DPDT contact (Screw)
	SM2S-05DF	SM2S-05DF	1	For DPDT contact (Screw)	
	Hold-Down Spring	SFA-202	SFA-202PN20	10 sets (20 pcs)	For SY4S-05A, SM2S-05A (2 pcs/set)
		SFA-511	SFA-511PN20	20	For SY4S-05D, SY4S-05DF, SM2S-05D, SM2S-05DF
SU9Z-S21T		SU9Z-S21T	10	For SU2S-21L, SU4S-21L	
Panel/PC Board Mount Socket	Socket	SY4S-51	SY4S-51	1	For 4DPT contact, Solder Terminal
		SY4S-61	SY4S-61	1	For 4DPT contact, PC Board Terminal
		SM2S-51	SM2S-51	1	For DPDT contact, Solder Terminal
		SM2S-61	SM2S-61	1	For DPDT contact, PC Board Terminal
	Hold-Down Spring	SFA-302	SFA-302PN20	10 sets (20 pcs)	For SY4S-51, SY4S-61, SM2S-51, SM2S-61 (2 pcs/set)

# GT5P Series Miniature Electronic Timers

## Economic Efficiency Focused Delayed Output SPDT/5A

- Three operation modes: ON Delay, Cycle, and One Shot
- Repeat error:  $\pm 0.2\% \pm 10$  ms maximum
- Complies with safety standards  
UL recognized, CSA certified, TÜV approved, EN compliant



Package Quantity: 1

Operation Mode	Contact	Output	Time Range	Operating Voltage	Part No. (Ordering No.)
ON Delay	SPDT	24V DC/ 120V AC, 5A 240V AC, 3A	3S	100 to 120V AC	GT5P-N3SA100
			10S		GT5P-N10SA100
			30S		GT5P-N30SA100
			60S		GT5P-N60SA100
			3M		GT5P-N3MA100
			6M		GT5P-N6MA100
			10M		GT5P-N10MA100
			1S		200 to 240V AC
			6S	GT5P-N6SA200	
			10S	GT5P-N10SA200	
			30S	GT5P-N30SA200	
			60S	GT5P-N60SA200	
			3M	GT5P-N3MA200	
			6M	GT5P-N6MA200	
			10M	GT5P-N10MA200	
			1S	24V AC/DC	GT5P-N1SAD24
			6S		GT5P-N6SAD24
			10S		GT5P-N10SAD24
			60S		GT5P-N60SAD24
			6M		GT5P-N6MAD24
10M	GT5P-N10MAD24				
10S	12V DC	GT5P-N10SD12			
30S		GT5P-N30SD12			
60S		GT5P-N60SD12			
10M		GT5P-N10MD12			
Cycle	SPDT	24V DC/ 120V AC, 5A 240V AC, 3A	3S	100 to 120V AC	GT5P-F3SA100
			10S	GT5P-F10SA100	
			3S	200 to 240V AC	GT5P-F3SA200
			10S	GT5P-F10SA200	
			3S	24V AC/DC	GT5P-F3SAD24
			10S	GT5P-F10SAD24	
			3S	12V DC	GT5P-F3SD12
			10S	GT5P-F10SD12	
One Shot	SPDT	24V DC/ 120V AC, 5A 240V AC, 3A	3S	100 to 120V AC	GT5P-P3SA100
			3S	200 to 240V AC	GT5P-P3SA200
			10S	GT5P-P10SA200	
			3S	24V AC/DC	GT5P-P3SAD24
			10S	GT5P-P10SAD24	

Note: S and M of time range indicate second and minute respectively.

## Time Ranges

Code	Time Range
1S	0.1 sec to 1 sec
3S	0.1 sec to 3 sec
6S	0.1 sec to 6 sec
10S	0.2 sec to 10 sec
30S	0.5 sec to 30 sec
60S	1 sec to 60 sec
3M	3 sec to 3 min
6M	6 sec to 6 min
10M	10 sec to 10 min

## Contact Ratings

Contact Configuration		SPDT
Maximum Switching Voltage		250V AC, 150V DC
Maximum Switching Current		5A
Maximum Switching Power		AC: 960VA DC: 120W
Rated Load	Resistive Load	120V AC / 24V DC, 5A 240V AC, 3A
	Inductive Load $\cos\phi = 0.4$ L/R = 15 ms	240V AC, 0.8A 120V AC, 1.4A 24V DC, 1.7A
Life	Electrical	100,000 operations minimum (rated resistive load)
	Mechanical	20,000,000 operations minimum

Minimum Applicable Load: 5V DC 10 mA (reference value)


### General Specifications

Model	GT5P-N	GT5P-F	GT5P-P
Operation	ON Delay	Cycle	One Shot
Pollution Degree	2 (IEC60664-1)		
Rated Operational Voltage	A200	200 to 240V AC (50/60Hz)	
	A100	100 to 120V AC (50/60Hz)	
	AD24	24V AC (50Hz/60Hz)/24V DC	
	D12	12V DC	
Voltage Range	A200	170 to 264V AC (50/60Hz)	
	A100	85 to 132V AC (50/60Hz)	
	AD24	20.4 to 26.4V AC (50/60Hz)/21.6 to 26.4V DC	
	D12	10.8 to 13.2V DC	
Operating Temperature	-10 to +50°C (no freezing)		
Storage Temperature	-30 to +70°C (no freezing)		
Operating Humidity	35 to 85% RH (no condensation)		
Storage Humidity	30 to 85% RH (no condensation)		
Altitude	0 to 2000m (operation), 0 to 3000m (transportation)		
Reset Time	100 ms maximum		
Repeat Error	±0.2%, ±10 ms		
Voltage Error	±0.5%, ±20 ms		
Temperature Error	±3%		
Setting Error	±10%		
Insulation Resistance	100 MΩ minimum (500V DC megger)		
Dielectric Strength	Between power and output terminals: 2000V AC, 1 minute		
	Between contacts of different poles: 2000V AC, 1 minute		
	Between contacts of the same pole: 750V AC, 1 minute		
Vibration Resistance	Damage Limits	10 to 55Hz, amplitude 0.75 mm, 2 hours each in 3 directions	
	Operating extremes	NO contact: 10 to 55 Hz, amplitude 0.5 mm NC contact: 10 to 55 Hz, amplitude 0.35 mm 10 minutes each in 3 directions	
Shock Resistance	Operating extremes: 98 m/s <sup>2</sup> , Damage limits: 490 m/s <sup>2</sup>		
Power Consumption (approx.)	A200	5.0 VA (60Hz)	5.0 VA (60Hz)
	A100	2.9 VA (60Hz)	2.9 VA (60Hz)
	AD24	1.4 VA (60Hz)/0.5W	1.4 VA (60Hz)/0.5W
	D12	0.6W	0.6W
Dimensions	36H × 29W × 81.5D mm		
Weight (approx.)	54g		


### Operation Charts and Internal Connections

Operation Mode	Item	Operation
On Delay	Terminal No. 2-7 (POWER)	Set Time
	5-8 (NC)	
	6-8 (NO)	
	POWER Indicator	
	OUT Indicator	
Cycle	Terminal No. 2-7 (POWER)	Set Time
	5-8 (NC)	
	6-8 (NO)	
	POWER Indicator	
	OUT Indicator	
One Shot	Terminal No. 13-14 (POWER)	
	3-4 (Start Input)	50ms minimum
	5-8 (NC)	
	6-8 (NO)	
	POWER Indicator	
OUT Indicator		

#### (Internal Connections)

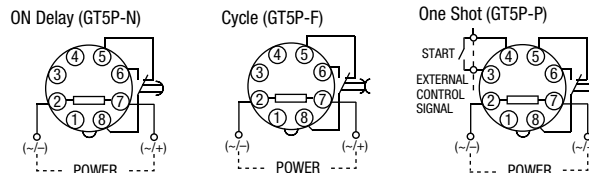

### Electrical Life Curves

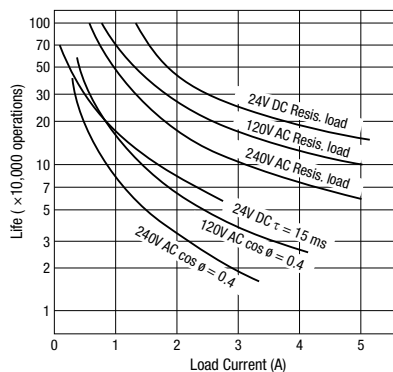


Dimensions

All dimensions in mm.


(When using DIN Rail Mount Socket)

SR2P-05B

For SR2P-05C, see Relay Sockets catalog.

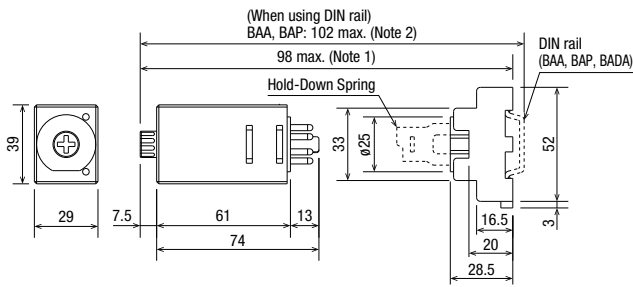

SR2P-06B

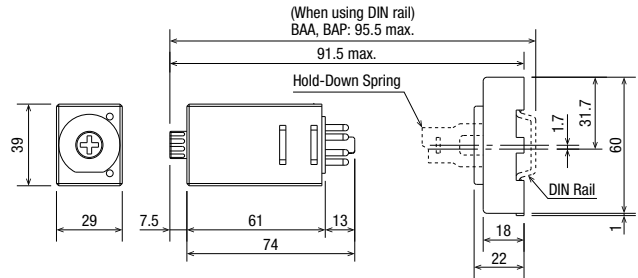


Note 1: SR2P-05C: 99.5 max.  
 Note 2: SR2P-05C: 103.5 max.

Mounting Hole Layout (for Panel/PC Board Mount Socket)


1. GT5Y-4

Panel Mount Socket (SY4S-51)

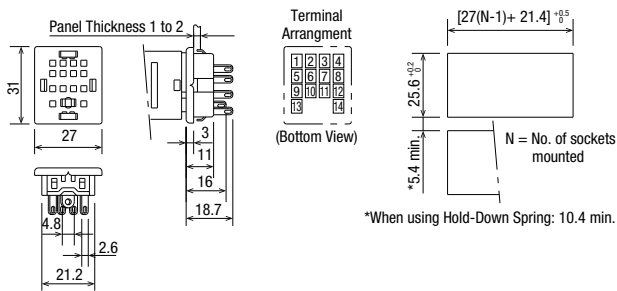


2. GT5Y-2


Panel Mount Socket (SM2S-51)

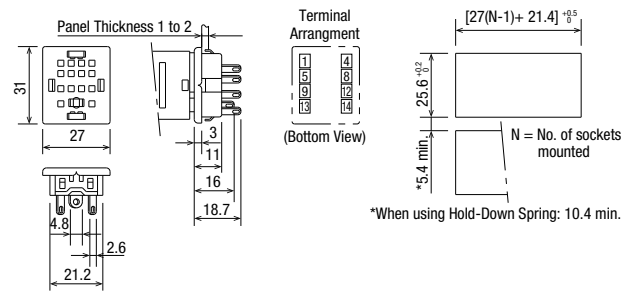

PC Board Mount Socket (SY4S-61)

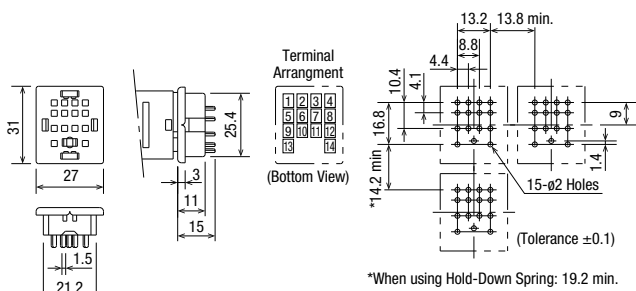


PC Board Mount Socket (SM2S-61)

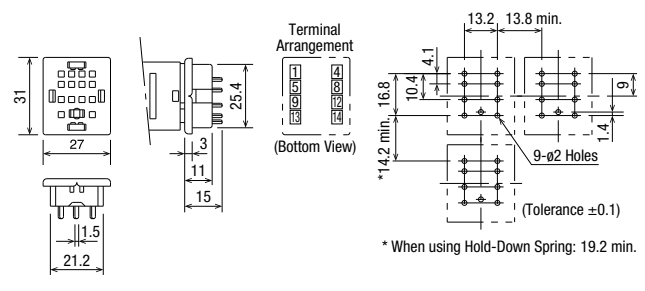


3. GT5P

Solder Terminal (SR2P-511)

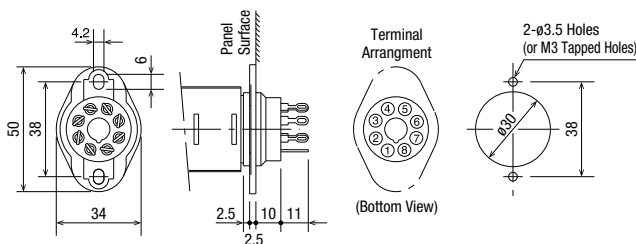

Wire Wrap Terminal (SR2P-70)

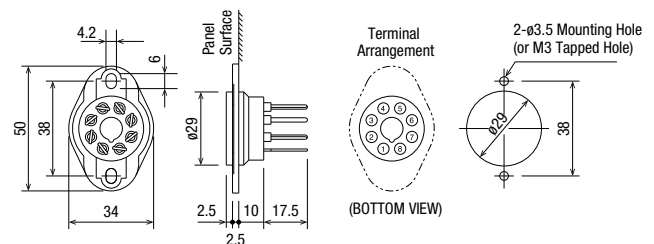


Accessories

Item	Part No.	Ordering No.	Package Quantity	Remarks	
DIN Rail Mount Socket	Socket	SR2P-06B	SR2P-06B	1	
		SR2P-05B	SR2P-05B	1	
		SR2P-05C	SR2P-05C	1	UL/CSA/TÜV
	Hold-Down Spring	SFA-202	SFA-202PN20	10 sets (20 pcs)	For SR2P-06A (2 pcs/set)
		SFA-203	SFA-203PN20	10 sets (20 pcs)	For SR2P-05A (2 pcs/set)
Panel Mount Socket	w/Solder Terminals	SR2P-511	SR2P-511	1	UL/CSA
	w/Wire Wrap Terminals	SR2P-70	SR2P-70	1	


Installation of Hold-Down Springs

DIN Rail Mount Socket

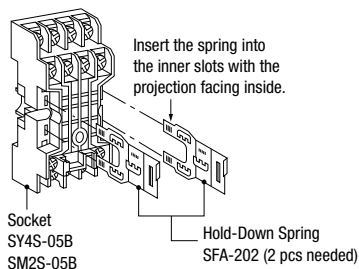

Recommended Tightening Torque and Terminal Screw

Timer	Applicable Socket	Terminal Screw	Recommended Tightening Torque
GT5Y	SY4S-05 SM2S-05	M3	0.6 to 1.0 N·m

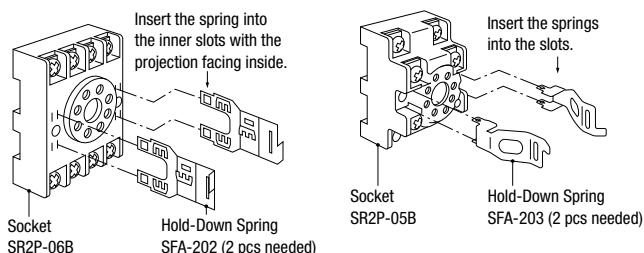


Note 1: Once installed into sockets, the hold-down springs cannot be removed.  
 Note 2: Hold-down springs cannot be used on SR2P-511 for GT5P.

Recommended Tightening Torque and Terminal Screw

Timer	Applicable Socket	Terminal Screw	Recommended Tightening Torque
GT5P	SR2P-05 SR2P-06	M3.5	1.0 to 1.3 N·m

Panel/PC Board Mount Socket

The SFA-302 Hold-Down Springs can be installed to the SY4S-51, SY4S-61, SM2S-51, and SM2S-61 sockets.

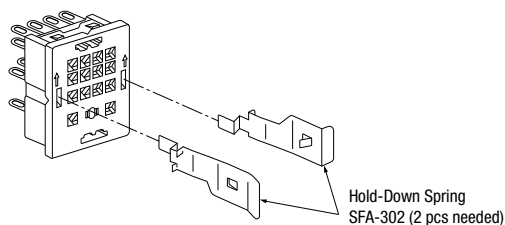


Hold-down springs cannot be installed to SR2P-511 and SR2P-70 panel mount sockets.

Installation/Removal of Hold-Down Springs


(Installation)

Insert the hold-down springs (SFA-511) into mounting holes 1 and 2 with the projection facing outside.

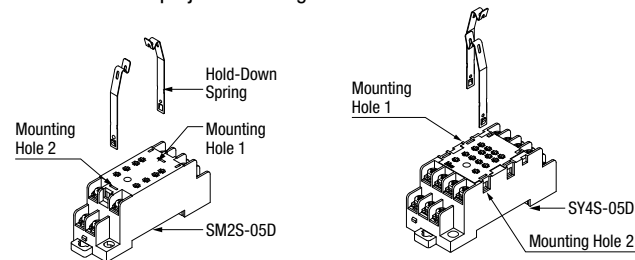

(Removal)


Press the projections of Hold-Down Springs (SFA-511) in the direction shown in the arrow and pull upward to remove.

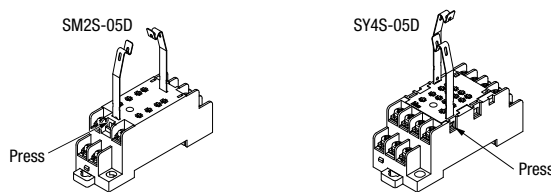

Installation/Removal of Hold-Down Springs


(Installation)

Insert the springs (SFA-511) into mounting holes 1 and 2 with the projection facing outside.

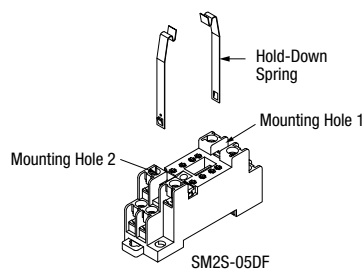

(Removal)

Press the projections of Hold-Down Springs (SFA-511) in the direction shown in the arrow and pull upward to remove.



Note: Apply the same method to SY4S-05DF.

## Safety Precautions


- Be sure to turn off power before mounting, removal, wiring, maintenance and inspection. Otherwise, electric shock or fire could occur.
- Be sure to use timers within rated specification values. Otherwise, electric shock or fire may occur.
- Be sure to use wires to meet voltage and current requirements and tighten M3.5 terminal screws to a tightening torque of 1.0 to 1.3 N·m. Be sure to solder the terminals correctly. Loose terminal screws or incomplete soldering may cause abnormal heat and fire.

## Instructions

### Time Range Setting

The time range is calibrated at its maximum time scale, therefore it is desirable to use the timer at a setting as close to its maximum time scale as possible for accurate time delay. For a more accurate time delay, adjust the control knob by measuring the operating time with a watch before application.

On the GT5Y timers, a desired time range can be selected using the time range selectors on the side surface. Turn the multiplier and time unit selectors using a flat screwdriver until they click.

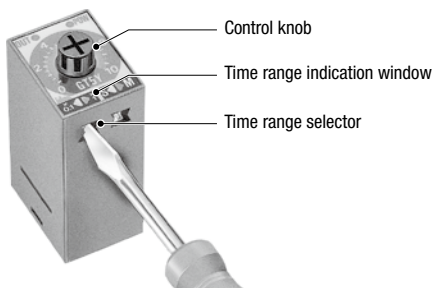

### Timing Accuracy

Timing accuracies are calculated from the following formulas:

#### Repeat Error

$$= \pm \frac{1}{2} \times \frac{\text{Max. measured value} - \text{Min. measured value}}{\text{Maximum scale value}} \times 100 (\%)$$

#### Voltage Error

$$= \pm \frac{T_v - T_r}{T_r} \times 100 (\%)$$

$T_v$ : Average of measured values at voltage V  
 $T_r$ : Average of measured values at the rated voltage

#### Temperature Error

$$= \pm \frac{T_t - T_{20}}{T_{20}} \times 100 (\%)$$

$T_t$ : Average of measured values at  $t^\circ\text{C}$   
 $T_{20}$ : Average of measured values at  $20^\circ\text{C}$

#### Setting Error

$$= \frac{\text{Average of measured values} - \text{Set value}}{\text{Maximum scale value}} \times 100 (\%)$$

### Use of External Input (GT5P-P Only)

1. Do not apply voltage to external input terminals 3 and 4. Be sure not to connect external inputs to other terminals because the internal circuit may be damaged.
2. Use reliable mechanical contacts capable of switching approximately 22V DC, 1 mA to close input terminals 3 and 4.  
(Closed: 1 k $\Omega$  maximum, Open: 100 k $\Omega$  minimum) The input terminals should not be connected to a ground wire of other devices.
3. Do not install input lines in parallel with high-voltage or motor lines. Use shielded wires or separate conduit for input lines, and make the input lines as short as possible.

### Load Current

The rated current of the contact (or control output) should not be exceeded. Especially for inductive, capacitive, and incandescent lamp loads, the inrush current as large as a few to several tens times the rated current may cause welded contacts and other troubles. The amount of inrush current as well as steady-state current must be taken into consideration.

### Contact Protection

Switching an inductive load generates a counter-electromotive force in the coil. The counter emf will cause arcing, which may shorten the contact life. Application of a protection circuit is recommended for contact protection.

### Rest Time

When turning power off after time-out, allow a rest time of 0.1 sec, and during operation, 1 sec at least.

### Power

Since DC types are designed to operate on DC power containing 10% or less ripple, insert a smoothing circuit when using a rectified AC power to operate DC type timers.

### Continuous Energizing

Continuous energizing for a long period of time may damage the electrical characteristics of the timer because of internal heating. Use an additional relay to the output circuit and refrain from continuous energizing of the timer.

### Dielectric Strength Test

When performing an insulation resistance or dielectric strength test on control panels containing timers, make sure that the dielectric strength of the timer is not exceeded. In case the dielectric strength is exceeded, remove the timers from the panels.

### Operating Environment

#### Temperature and Humidity

Use the timer within the operating temperature and operating humidity ranges and prevent freezing and condensation. After storing below the operation temperature, leave the timer at room temperature for a sufficient period of time before use.

#### Environment

Prevent a corrosive gas such as sulfurous or ammonia gas, organic solvents (alcohol, benzine, thinner, etc.), strong alkaline substances or strong acids from touching to the timer, and do not use the timer in such an environment. Keep the timer from water splashes or steam.

#### Vibration and Shock

Since excessive vibrations or shocks cause the output contacts to open, the timer should be used within the operating extremes of vibration and shock resistance. Use of hold-down springs is recommended for secure mounting on sockets.

### Others

- Use a mechanical-contact switch or relay to supply power to the time.
- When driving the timer using a solid-state output device such as two-wire proximity switch, photoelectric switch or solid-state relay directly, malfunction may be caused by a leakage current from the solid-state device. Be sure to check thoroughly before using.
- Since AC types (such as A100 and A200) comprise a capacitive load, the SSR dielectric strength should be two or more times as large as the power voltage when switching the timer power using an SSR.
- To make a sequence circuit by connecting timer and relay, check the timer operation sufficiently in consideration of the reset time of the timer.



# Ordering Terms and Conditions

Thank you for using IDEC Products.

By purchasing products listed in our catalogs, datasheets, and the like (hereinafter referred to as "Catalogs") you agree to be bound by these terms and conditions. Please read and agree to the terms and conditions before placing your order.

## 1. Notes on contents of Catalogs

- (1) Rated values, performance values, and specification values of IDEC products listed in this Catalog are values acquired under respective conditions in independent testing, and do not guarantee values gained in combined conditions.  
Also, durability varies depending on the usage environment and usage conditions.
- (2) Reference data and reference values listed in Catalogs are for reference purposes only, and do not guarantee that the product will always operate appropriately in that range.
- (3) The specifications / appearance and accessories of IDEC products listed in Catalogs are subject to change or termination of sales without notice, for improvement or other reasons.
- (4) The content of Catalogs is subject to change without notice.

## 2. Note on applications

- (1) If using IDEC products in combination with other products, confirm the applicable laws / regulations and standards.  
Also, confirm that IDEC products are compatible with your systems, machines, devices, and the like by using under the actual conditions. IDEC shall bear no liability whatsoever regarding the compatibility with IDEC products.
- (2) The usage examples and application examples listed in Catalogs are for reference purposes only. Therefore, when introducing a product, confirm the performance and safety of the instruments, devices, and the like before use. Furthermore, regarding these examples, IDEC does not grant license to use IDEC products to you, and IDEC offers no warranties regarding the ownership of intellectual property rights or non-infringement upon the intellectual property rights of third parties.
- (3) When using IDEC products, be cautious when implementing the following.
  - i. Use of IDEC products with sufficient allowance for rating and performance
  - ii. Safety design, including redundant design and malfunction prevention design that prevents other danger and damage even in the event that an IDEC product fails
  - iii. Wiring and installation that ensures the IDEC product used in your system, machine, device, or the like can perform and function according to its specifications
- (4) Continuing to use an IDEC product even after the performance has deteriorated can result in abnormal heat, smoke, fires, and the like due to insulation deterioration or the like. Perform periodic maintenance for IDEC products and the systems, machines, devices, and the like in which they are used.
- (5) IDEC products are developed and manufactured as general-purpose products for general industrial products. They are not intended for use in the following applications, and in the event that you use an IDEC product for these applications, unless otherwise agreed upon between you and IDEC, IDEC shall provide no guarantees whatsoever regarding IDEC products.
  - i. Use in applications that require a high degree of safety, including nuclear power control equipment, transportation equipment (railroads / airplanes / ships / vehicles / vehicle instruments, etc.), equipment for use in outer space, elevating equipment, medical instruments, safety devices, or any other equipment, instruments, or the like that could endanger life or human health
  - ii. Use in applications that require a high degree of reliability, such as provision systems for gas / waterworks / electricity, etc., systems that operate continuously for 24 hours, and settlement systems
  - iii. Use in applications where the product may be handled or used deviating from the specifications or conditions / environment listed in the Catalogs, such as equipment used outdoors or applications in environments subject to chemical pollution or electromagnetic interference  
If you would like to use IDEC products in the above applications, be sure to consult with an IDEC sales representative.

## 3. Inspections

We ask that you implement inspections for IDEC products you purchase without delay, as well as thoroughly keep in mind management/maintenance regarding handling of the product before and during the inspection.

## 4. Warranty

- (1) Warranty period  
The warranty period for IDEC products shall be one (1) year after purchase or delivery to the specified location. However, this shall not apply in cases where there is a different specification in the Catalogs or there is another agreement in place between you and IDEC.
- (2) Warranty scope  
Should a failure occur in an IDEC product during the above warranty period for reasons attributable to IDEC, then IDEC shall replace or repair that product, free of charge, at the purchase location / delivery location of the product, or an IDEC service base. However, failures caused by the following reasons shall be deemed outside the scope of this warranty.
  - i. The product was handled or used deviating from the conditions / environment listed in the Catalogs
  - ii. The failure was caused by reasons other than an IDEC product
  - iii. Modification or repair was performed by a party other than IDEC
  - iv. The failure was caused by a software program of a party other than IDEC
  - v. The product was used outside of its original purpose
  - vi. Replacement of maintenance parts, installation of accessories, or the like was not performed properly in accordance with the user's manual and Catalogs
  - vii. The failure could not have been predicted with the scientific and technical standards at the time when the product was shipped from IDEC
  - viii. The failure was due to other causes not attributable to IDEC (including cases of force majeure such as natural disasters and other disasters)Furthermore, the warranty described here refers to a warranty on the IDEC product as a unit, and damages induced by the failure of an IDEC product are excluded from this warranty.

## 5. Limitation of liability

The warranty listed in this Agreement is the full and complete warranty for IDEC products, and IDEC shall bear no liability whatsoever regarding special damages, indirect damages, incidental damages, or passive damages that occurred due to an IDEC product.

## 6. Service scope

The prices of IDEC products do not include the cost of services, such as dispatching technicians. Therefore, separate fees are required in the following cases.

- (1) Instructions for installation / adjustment and accompaniment at test operation (including creating application software and testing operation, etc.)
- (2) Maintenance inspections, adjustments, and repairs
- (3) Technical instructions and technical training
- (4) Product tests or inspections specified by you

The above content assumes transactions and usage within your region. Please consult with an IDEC sales representative regarding transactions and usage outside of your region. Also, IDEC provides no guarantees whatsoever regarding IDEC products sold outside your region.

# IDEC CORPORATION

**Head Office** 6-64, Nishi-Miyahara-2-Chome, Yodogawa-ku, Osaka 532-0004, Japan

 [www.idec.com](http://www.idec.com)

**USA** IDEC Corporation  
**EMEA** APEM SAS

**Singapore** IDEC Izumi Asia Pte. Ltd.  
**Thailand** IDEC Asia (Thailand) Co., Ltd.  
**India** IDEC Controls India Private Ltd.

**China** IDEC (Shanghai) Corporation  
IDEC Izumi (H.K.) Co., Ltd.  
**Taiwan** IDEC Taiwan Corporation

**Japan** IDEC Corporation

Specifications and other descriptions in this brochure are subject to change without notice.

2023 IDEC Corporation, All Rights Reserved.

