


INSTRUCTION SHEET

XA1E Series

Thank you for selecting IDEC product. Please confirm that the delivered product is what you have ordered.

5 Removing/Installing LED unit

- Removing
Pull out the LED unit while pinching the latches on the LED unit using special tool MT-101.
- Installing
Align the top of the LED unit with the TOP marking on the contact block.
Push the LED unit into the contact block.



6 Specifications

Applicable Standard	IEC 60947-5-1, EN 60947-5-1, IEC 60947-5-5 ^{*)} , EN 60947-5-5 ^{*)} , JIS C8201-5-1, UL508, CSA C22.2 No.14, CCC GB/T14048.5
Standard Operating Conditions	Operating Temperature Non illuminated: 25 to 60 °C (no freezing) LED illuminated: 25 to 55 °C (no freezing) Relative humidity: 45 to 85 % RH (no condensation) Storage temperature: 45 to 80 °C (no freezing)
Minimum Direct Opening Force	60 N
Minimum Direct Opening Travel	4,0 mm
Maximum Travel	4,5 mm
Contact Resistance	50 mΩ maximum (initial value)
Insulation Resistance	100 MΩ minimum (500V DC megger)
Overvoltage Category	III
Impulse Withstand Voltage	2,5 kV
Pollution Degree	3
Operating Frequency	900 operations/hour
Mechanical Life	250,000 operations minimum
Electrical Life	100,000 operations minimum 250,000 operations minimum (24V AC/DC, 100mA)
Shock Resistance	Operating extremes: 150 ms ² Damage limits: 1,000 ms ²
Vibration Resistance	Operating extremes: 10 to 500 Hz, amplitude 0,35 mm, acceleration 50 ms ² Damage limits: 10 to 50 Hz, amplitude 0,35 mm, acceleration 50 ms ²
Degree of Protection	Panel front: IP65(IEC 60523) Type1,4X,12,13 ^{*)}
Short-circuit Protective Device	250V/10A fuse (Type aM IEC 60269-1 / IEC 60269-2)
Conditional Short-circuit Current	1,000 A
Terminal Style	Solder terminal, PC board terminal
Recommended Tightening Torque of Locking Ring	0,88 N·m
Applicable Wire	1,25 mm ² maximum (AVG16 maximum)
Soldering Condition	310~350°C / 3 seconds


Note: *1 These standards require red-colored operator buttons.
Emergency stop switches with other-colored operator buttons conform to all other requirements except for the color requirement.
*2 For use on the flat surface of a type1,2 and for13 enclosure.

SAFETY NOTE


- Read this instruction sheet and the catalog for the XA1E series emergency stop switches to make sure of correct operation before starting installation, wiring, operation, maintenance, and inspection. Make sure that the instruction sheet is kept by the end user.
- Turn off the power to the XA1E before starting installation, wiring, maintenance and inspection of the XA1E. Failure to turn power off may cause electric shock or fire hazard.
- Use wires of an appropriate size to meet the voltage and current requirement. Using inappropriate wires may cause overheat, resulting in possible fire hazard. Also provide necessary protection against electric shock, otherwise electric shock or fire hazard may be caused.

1 Removing and Installing the Contact Block

- Removing
First unlock the operator button. While pushing up the white bayonet ring with force, using a small screwdriver (width: 3 mm maximum) if necessary, turn the contact block counterclockwise and pull out.
- Notes for removing the contact block
1) When the contact block is removed, (Turn counterclockwise) the monitor contact (NO contact) is closed.
2) While removing the contact block, do not exert an excessive force, otherwise the switch may be damaged.



- Installing
First turn the bayonet ring tab to the unlocked position.

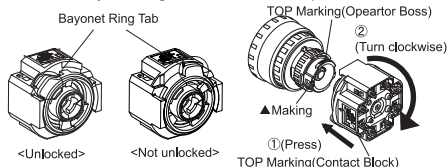

Align the small ▲ marking on the edge of the operator boss with the TOP marking on the contact block. Press the contact block onto the operator and turn the contact block clockwise until the bayonet ring clicks. Make sure that the contact block is securely installed by confirming that the contact does not turn counterclockwise.

2 Notes for Operation

- Contact Bouncing
When the button is reset by pulling or turning, the NC main contacts cause bouncing. When pressing the button, the NO monitor contacts cause bouncing. When designing a control circuit, take the contacts cause bouncing into consideration (reference value: 20 ms).
- Handling
Do not expose the switch to excessive shocks and vibrations, otherwise the switch may be deformed or damaged, causing malfunction or operation failure.


3 Contact Ratings [Main Contact (NC) and Monitor Contact (NO)]

Rated Insulation Voltage (Ui)		300V				
Rated Current (Ith)		5A				
Rated Operating Voltage (Ue)		30V	125V	250V		
Rated Operating Current	Main Contact	AC	Resistive Load (AC-12)	-	3A	3A
		50/60Hz	Inductive Load (AC-15)	-	1.5A	1.5A
Rated Operating Current	Monitor Contact	DC	Resistive Load (DC-12)	2A	0.4A	0.2A
			Inductive Load (DC-13)	1A	0.22A	0.1A
Rated Operating Current	Main Contact	AC	Resistive Load (AC-12)	-	1.2A	0.6A
		50/60Hz	Inductive Load (AC-14)	-	0.6A	0.3A
Rated Operating Current	Monitor Contact	DC	Resistive Load (DC-12)	2A	0.4A	0.2A
			Inductive Load (DC-13)	1A	0.22A	0.1A


4 Built-in LED Ratings

Rated Voltage	Operating Voltage	Operating Current
24V AC/DC	24V AC/DC ± 10%	11 mA

7 Contact Arrangements (Bottom View) 8 Mounting Hole Dimensions

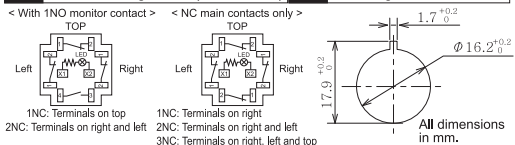

9 LED unit internal circuit 10 Notes for Using Nameplate



11 Precaution for Disposal

Dispose of the XA1E Series as an industrial waste.

IDEC CORPORATION <http://www.idec.com>

Manufacturer: IDEC CORP.
2-6-64 Nishimiyahara Yodogawa-ku, Osaka 532-0004, Japan
EU Authorized Representative: APEM SAS
65, Avenue Edouard Herriot BP1, 82303 Causseade Cedex, France
EU DECLARATION OF CONFORMITY
We, IDEC CORPORATION 2-6-64, Nishimiyahara Yodogawa-ku, Osaka 532-0004, Japan declare under our sole responsibility that the product:
Description: Emergency Stop Switches or Switches
Model No. XA Series
Applied Union harmonized legislation and references to the relevant harmonization standards used or references to other technical specifications in relation to which conformity is declared.
Applicable EU Directive : Low Voltage Directive (2014/35/EU)
Machinery Directive (2006/42/EC) applied to Emergency-Stop Switch only
RoHS Directive (2011/65/EU)
Applicable Standard(s) : EN IEC 60947-5-1, EN 60947-5-1
EN 60947-5-5 (Emergency-Stop Switch only)
UK Authorized Representative: APEM COMPONENTS LIMITED
Draxton Drive, Long Crendon, Buckinghamshire, HP18 9BA, UK
Electrical Equipment (Safety) Regulations 2016,
Supply of Machinery (Safety) Regulations 2008,
The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012
Applicable Standard(s) : EN 60947-5-1, EN IEC 60947-5-1